

BOLLARDS (TYP. OF 4) AND SIGNAGE TO WARN OF BURIED TANK

PLAN VIEW

STEEL COVERS TO BE PADLOCKED AND POSTED WITH CONFINED SPACE WARNING SIGNS.


CLEAN FILL

NO MORE THAN 12" OF FILL ABOVE TOP OF TANK

DO NOT MACHINE COMPACT

APPROX. 1/3 HEIGHT SAND BACKFILL AFTER PLACEMENT OF TANK

SAND BED PREPARED PRIOR TO PLACEMENT OF TANK

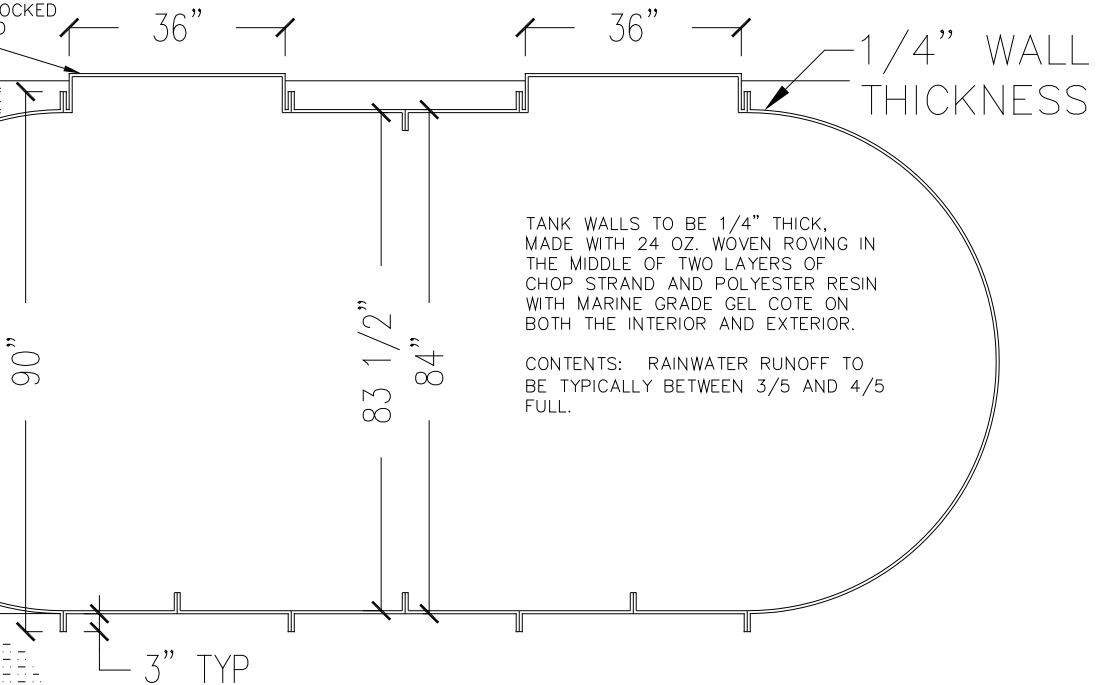

TANK WALLS TO BE 1/4" THICK, MADE WITH 24 OZ. WOVEN ROVING IN THE MIDDLE OF TWO LAYERS OF CHOP STRAND AND POLYESTER RESIN WITH MARINE GRADE GEL COATE ON BOTH THE INTERIOR AND EXTERIOR.

CONTENTS: RAINWATER RUNOFF TO BE TYPICALLY BETWEEN 3/5 AND 4/5 FULL.

SECTION A-A

SHEET

S1.1

4000 GALLON TANK

1/4" THICK FIBERGLASS WITH 24oz WOVEN ROVING



Ladera Ranch, Ca 92694
 p. 888.445.RAIN f. 866.913.5032
 info@raindeck.com